



## RESEARCH ARTICLE

### CONTROL OF CARBON DIOXIDE AND OTHER EMISSIONS FROM DIESEL OPERATED ENGINES USING ACTIVATED CHARCOAL

\*Shaik Sameer, Dr. P. Vijayabalan and Dr. Mylaudy

Department of Automobile Engineering, Hindustan Institute of Technology & Science, Hindustan University, Chennai, Tamil Nadu, India

#### ARTICLE INFO

##### Article History:

Received 25<sup>th</sup> February, 2016  
Received in revised form  
04<sup>th</sup> March, 2016  
Accepted 20<sup>th</sup> April, 2016  
Published online 20<sup>th</sup> May, 2016

##### Key words:

Control of carbon dioxide, Adsorption, Activated charcoal, Steam activation, Emission and smoke test.

#### ABSTRACT

Carbon dioxide is a major cause of natural calamities and changes in climatic conditions. Of all the sources of emission, the amount of carbon dioxide from automobiles is approximately 65%, which is more than any other sources of emissions. Raise in carbon dioxide content in atmosphere is causing global warming which is evolved from greenhouse gases. To reduce the emission and control of carbon dioxide percentage in atmosphere from automobiles, theoretical & practical methods of adsorption of carbon dioxide using activated charcoal (carbon) in diesel operated engines is conducted. Charcoal is one of the best adsorption material due to its high pores volume and capture capacity, when reacted with other reagents in order of activation, it increases its adsorption capacity than that of regular charcoal. In this project the activation of charcoal is a steam activation. The amount of carbon dioxide exhausted from diesel engine in ideal condition and after the reactor chamber is added to the exhaust system the content of carbon dioxide is controlled up to 9.266%.

Copyright © 2016, Shaik Sameer et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Citation: Shaik Sameer, Dr. P. Vijayabalan and Dr. Mylaudy, 2016. "Control of carbon dioxide and other emissions from diesel operated engines using activated charcoal", *International Journal of Current Research*, 8, (05), 31109-31115.

#### INTRODUCTION

Carbon dioxide is the one of the gases in atmosphere bearing percentage of 0.04, it plays an important role in maintaining optimal condition of earth by enriching photosynthesis in plants and other benefits, but it has also become a major issue in the recent decade due to its increase in percentage leading to increasing the global temperature, which causes melting down of glaciers and increasing water levels, heavy changes in temperature. There are two major sources of carbon dioxide, natural and human. Natural sources are ocean-atmosphere exchange, plant and animal respiration, soil respiration and decomposition and finally volcanic eruption. Human sources are fossil fuel usage, land use changes and industrial process. Carbon dioxide is the primary greenhouse gas emitted through human activities, the main activity that emits carbon dioxide is the combustion of fossil fuels (coal, natural gas and oil) for energy and transportation, although sustain industry process and land use changes also emit carbon dioxide. The main sources of carbon dioxide are car electric, transportation and industry. Carbon dioxide is constantly being exchanged among the atmosphere, ocean and land surface as it both produces and

adsorb many microorganisms, plants and animals. However, emissions and removal of carbon dioxide by this natural process tend to balance. Since the industrial revolution began around 1750, human activity has contributed substantially to the climatic change by adding carbon dioxide and other heat trapping gases to atmosphere. Rajadurai *et al.* (2015) the efforts of humans to gain more energy output is dearly costing the entire planet in phase of carbon dioxide, emission of this gas can be controlled by implementing some major changes at the source of emissions. An inventive trend of using a chamber at the tailpipe of an exhaust system, which traps and stores the carbon dioxide from the exhaust gases. Modified charcoal made of coconut trunk and stem is used to trap and store carbon dioxide from the exhaust gases. The theory of storage and using of carbon dioxide can be helpful in many other industrial processes which use carbon dioxide for many other purposes. (JenorisMuthya, 2014; MuhammedZaman and Jay Hyung Lee, 2013) Valentinas Mukunaitis *et al.* (2007) the total content of carbon dioxide emissions from diesel operated engine is lesser than that of petrol engine, in numerical terms its 27% and 17% petrol and diesel respectively. When the engine displacement is high then the consumption of fuel is also high. Catalytic converter is another major part which plays an important role in the exhaust system, the process of oxidation and reduction of on dangerous gases emitted from the exhaust gases, there are

\*Corresponding author: Shaik Sameer,  
Department of Automobile Engineering, Hindustan Institute of Technology & Science, Hindustan University, Chennai, Tamil Nadu, India.

also major break through which helps in improving the performance of catalytic convertor without any changes their properties, like back pressure and flow of gases. (Pankaj Kumar Singh and NamanTaneja, 2015; Karuppusamy and Senthil, 2013) In order to reduce carbon dioxide from the automobile exhaust emission we used granular activated charcoal which has diffusion of adsorbate is thus an important factor this carbons are suitable of adsorption of gases and vapours, because they diffuse rapidly. Granular carbon are used for water treatment, deodorization and separation of components of flow system and also used in rapid mix basins.

### Specifications of Engine

Table 1. Specification of engine

Engine Make	Volkswagen Jetta 2.0L
Displacement	1968cc
Bore	82.5mm
Stroke	92.8mm
Emission Standards	Bharath standards IV
Maximum Power	425HP
Exhaust Specifications	Three way convertor
Compression Ratio	10.5:1
Fuel Type	Diesel



Figure 1. Jetta vehicle 2.0 L

### Gas Analyser

Gas analyser is a device which is used to measure the content of various gases present in a system or surroundings. Here it is used in measuring the content of hydrocarbons, carbon monoxides, carbon dioxide and nitrogen and lamda present in the exhaust gases of and engine. (Mr.Sibu Thomas and Ms. Nishi ShahnajHaider, 2013).



Figure 2. Gas Analyser

The technical specification of a gas analyser are as follows.

### Activated Charcoal

Activated carbon is a type of carbon that is activated and carefully controlled oxidation process to improve porous structure of carbon. The improper structure of carbons in a high degree of porosity and over a broad range of pore sizes, visible cracks and minute to gaps and voids of molecular dimensions the determined structure of carbon will give it a very large surface area which undergoes the carbon to adsorb a huge amount of carbon molecules. Activated carbon has a high volume to adsorb porosity of any kind of material that is available in mankind.

The ingredients needed to prepare the coconut shell catalyst are as follows:

Charcoal	: 1400gm
Zinc chloride	: 56gm

- 1400 ml of distilled water was taken in a beaker.
- 56 gram of  $ZnCl_2$  was added in the beaker.
- Both the  $ZnCl_2$  and distilled water were mixed to form a solution.
- 950 gram of coconut charcoal was added inside the solution beaker.
- The mixture was tried continuously to have a better coating on the coconut charcoal.
- The coated sample was heated treated in furnace for 14 hours at  $85^\circ C$ .

Table 2. Technical specification of gas analyser

Measured quality	Measuring range	Resolution	Accuracy
CO	0.0-15% vol	0.01 % vol	0-10% +/-0.02% abs +/-3% rel 10.01%-15% +/- 5% rel
CO <sub>2</sub>	0.0-20% vol	0.01 % vol	0-16% +/-0.3% abs +/-3% rel 16.01%-20% +/- 5% rel
HC	0.0-30000 ppm	≤2000: 1 ppm vol >2000: 10 ppm vol	0-4000ppm +/- 8ppm 3% rel 4001-10000ppm 5%rel 10001-30000ppm 10%rel
O <sub>2</sub>	0.0-25% vol	0.01 % vol	+/- 0.02 % abs 1% rel
NO	0.0-5000 ppm vol	1 ppm vol	+/- 5 ppm 1% rel
Engine speed	400-6000 min <sup>-1</sup>	1 min <sup>-1</sup>	±1% of ind val
Oil temperature	0.0-125 °C	1 °C	± 4°C
Lambda	0.0-9.999	0.001	Calculation of CO,CO <sub>2</sub> ,HC,O <sub>2</sub>



Zinc chloride



Charcoal

Figure 3. Ingredient for surface coating of coconut shell charcoal using ZnCl<sub>2</sub>

Table 3. Specification of activated charcoal

Shape	Granular
FC	75% Min
VM	17% Max
Ash & Foreign Matter	5%
Max Moisture	16%
Grade	4x8 USS mesh
Passing Through	4.75mm X 2.36mm

## Design Concept

### A. Design Calculation

The catalytic convertor is designed with the following three objectives:-

- Simple construction(No complicated construction)
- To obtain a greater Surface area.
- To reduce the back pressure.
- The network output per cycle from the engine is dependent on the pumping work consumed, which is directly

proportional to the backpressure. To minimize the pumping work, backpressure must be low as possible. The backpressure is directly proportional to the catalytic converter design. The catalytic substrate and shape of the inlet cone does not contribute to the backpressure. (Pankaj Kumar Singh and NamanTaneja, 2015; Karuppusamy and Senthil, 2013)

The cylindrical shape was considered due to ease of fabrication, minimum assembly time, rigidity and easier maintenance.

### Space Velocity

The time necessary to process one reactor volume of gases. Calculation for Determination of Diameter and Length

$$\text{Space velocity} = \frac{\text{Volume of flow rate}}{\text{Catalysts volume}}$$

Assuming Space Velocity = 16000 m/hr.

Volume flow rate = Swept volume × Number of Intake stroke per hour

$$\text{Volume flow rate} = \frac{\pi}{4} \times (82.5)^2 \times (92.8) \times \frac{1500}{2} \times 60 = 44.427 \text{ m}^3$$

$$\text{Catalysts volume} = \frac{\text{Volume flow rate}}{\text{space velocity}}$$

$$= \frac{44.78}{16000}$$

Volume of Catalyst = 0.0027m<sup>3</sup>.

### Shell Dimension

The Shell is the cylindrical part between the inlet and outlet cones. Activated charcoal will be placed inside this shell

$$V_{\text{catalyst}} = \frac{\pi}{4} \times D^2 \times Lz$$

Where D= Diameter of the catalyst

L= Length of the Catalyst

$$L = 3D \text{ (Assume)}$$

$$0.0027 = 0.785 \times D^3 \times 3$$

$$D = 0.103\text{m}$$

$$L = 3D$$

$$L = 3 \times 108$$

$$L = 309\text{mm}$$

### B. Experimental Layout

This flow chart explains about experiential work that deals with the adsorption of carbon dioxide. The diesel operated engine's exhaust is connected to the after-treatment system, which leads to muffler which reduces the turbulence or the flow in gases and passes through the intermediate valve. Which is connected to two way valve, where the connection

leads to atmosphere and the other leads to a experiential setup connected to flow meter, in the first connection, when there is over flow of gases, open the two way valve to the atmosphere till we get the constant flow. If a constant flow is generated then we close the secondary valve and open primary valve which is connected to flow meter. Flow meter now shows the mass flow of gases from the exhaust towards the reactor chamber.

Then further a two way valve is fixed to collect the sample gas and measure the content of gases present in the flow, this flow of gas is passed through the reactor chamber where the reaction (adsorption) is taken place and then a second sample is taken to measure the content of gases absorbed in the reaction chamber. Then the gases are passed out the atmosphere.

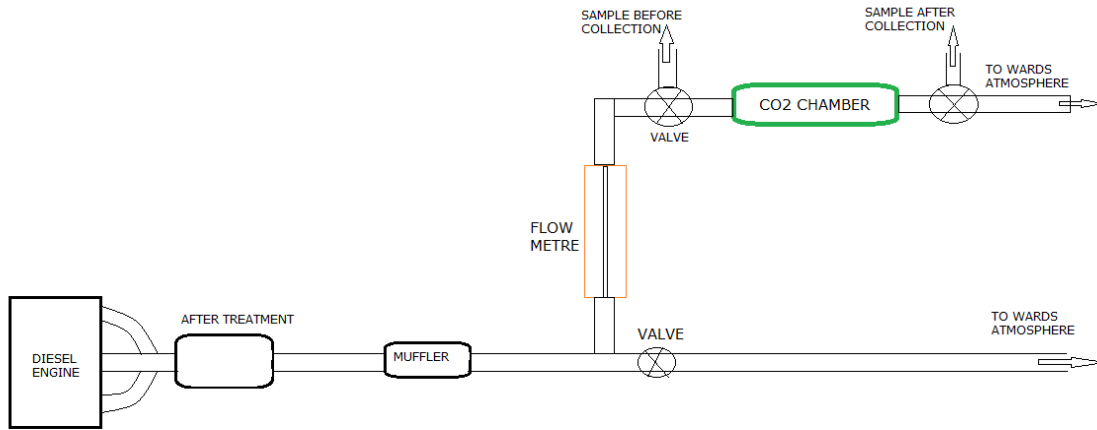


Figure 4. Flowchart of experiment setup

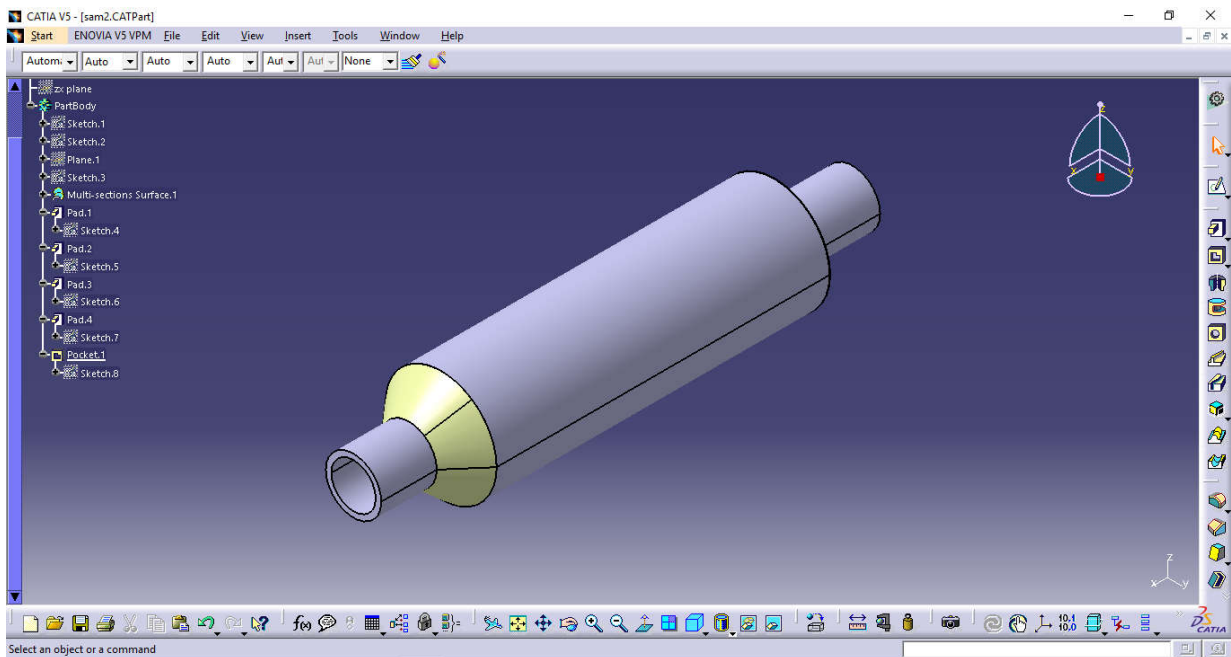


Figure 5. Reactor chamber

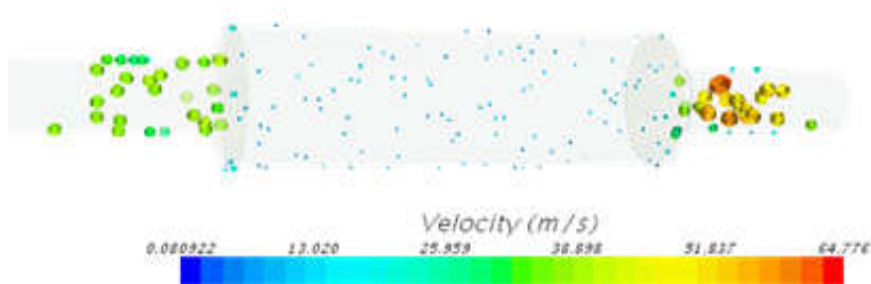


Figure 6. Flow in a reactor chamber



**Design Validation**

The validation of design is done using catia and CFD analysis, this involves various stages of procedures as follows,

It is necessary to test Pressure drop and flow uniformity index in CFD analysis.

**CFD Analysis**


**Boundary Condition**

**Table 4. Boundary condition**

Domain	Type	Value
Inlet	Mass Flow rate	195kg/h
Outlet	Pressure	1atm
Inlet	Temp	200 <sup>o</sup>
Outlet	Temp	30 <sup>o</sup>
Reaction Chamber (charcoal)	Porosity	0.89


**Pressure Drop**

Below figure 4 show the pressure drop obtained in both cases:  
 Case A – Charcoal Chamber, (Flow through top to bottom)  
 Case B – Charcoal Chamber, (Flow through only cone)

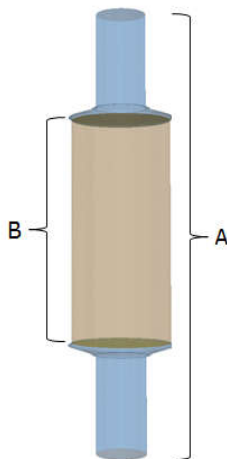

**Figure 7. Charcoal chamber**


Below, Figures 8 shows the pressure drop between two cases. For Case A, the observed pressure drop is 75.045mbar; for Case B, the observed pressure drop is 65.538mbar. The calculated pressure drop is within target criteria. Hence, it will not affect engine performance.

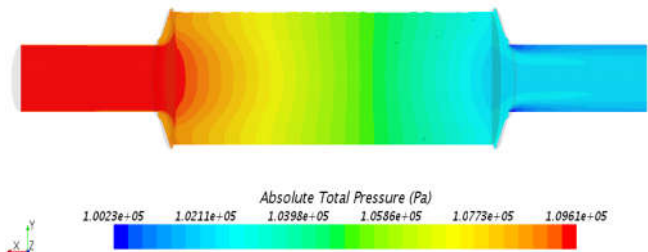


**Figure 8. Absolute pressure drop**

**Uniformity Index**

Below, Figures 9 show the uniformity plot of Activated Charcoal chamber, respectively. The reactor chambers' uniformity is 0.889, however, the target is > 0.90 for initial confirmation of the analysis. To reach the uniformity target, inlet and outlet cone optimization is done

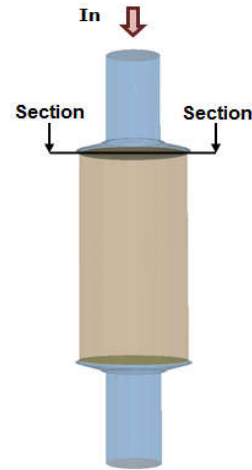

**Figure 9. CFC Uniformity plane Section at Inlet of Alumina Chamber**

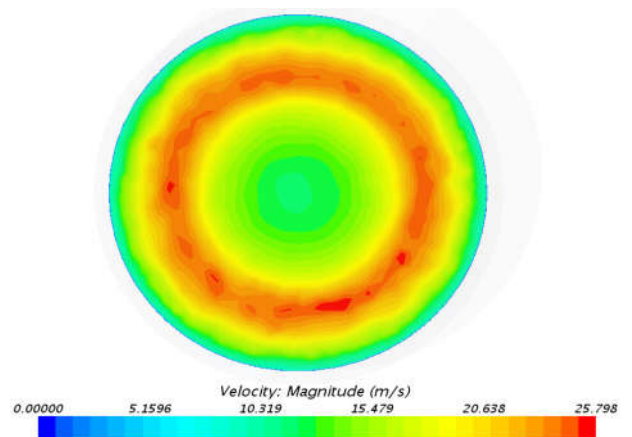

**Figure 10. Uniformity plot of Alumina Reactor front face**

**Layout Fabrication**

A wire mesh is rolled in the cylindrical shape with the same or lesser dimensions of the reaction chamber. With both closed ends, as shown in the figure 11 below. Which is filled with activated charcoal in it.



**Figure 11. Wire Mesh filled with charcoal**

Then that wire mesh is imposed in to the reaction chamber where the adsorption process takes place, the below figure 12 shows the reactor chamber with activated charcoal wire mesh.



Figure 12. Reactor Chamber

This is fixed to the setup, where the experiment is carried out, the experimental layout is shown below in step by step procedure.



Figure 13. Reactor chamber with wire mesh containing activated charcoal as catalyst

### Experimental Procedure

The test on CO<sub>2</sub> reactor chamber is conducted on Volkswagen Jetta TDI 2.0l with automatic transmission. AVG gas analyser is used to measure the content of gases and their percentage present in the exhaust.

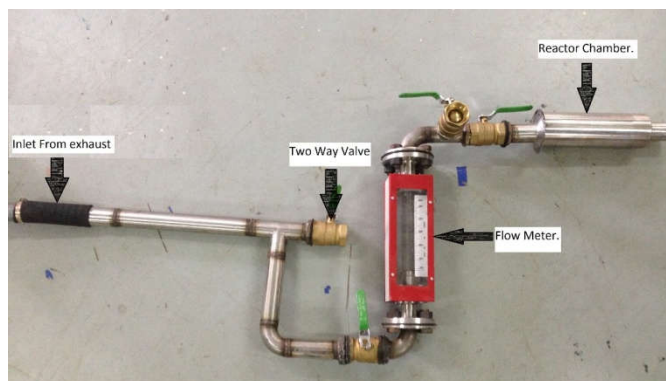


Figure 14. Assembly of the layout

### Layout assembly & procedure of testing

- Initially the reactor chamber is prepared by placing wire mesh with activated charcoal in it and fixed to the fabricated layout.
- Flow meter is now connected to the setup and placed vertically.
- Now the tailpipe of the vehicle is connected to the flow meter using two way valves in the procedure, which is used to regulate the flow of the exhaust in to the setup or to the atmosphere. There are two way valves placed in front of the reactor chamber and next to the chamber which are used to collect the sample gases, by which the content of gases can be determined.

## RESULTS AND DISCUSSION

After performing the testing on the setup according to variation on rpm, sample gases are collected to test the percentage of various gases present in it, before and after the testing is performed. The results are as follows,

Table 5. Test results 1

S.No	Condition	Rpm	Content	Mean	Percentage	Over-all
1	Idle	800	2.56	0.26	10.5%	9.266%
	After	800	2.3			
2	Idle	1700	3.93	0.44	11.1%	
	After	1700	3.49			
3	Idle	2400	3.70	0.25	6.2%	
	After	2400	3.45			

The overall reduction of carbon dioxide by this experiment is 9.266% from the exhaust gases.

Table 5. Emission Test 2

Condition	RPM	HC	CO	CO <sub>2</sub>	O <sub>2</sub>	NO <sub>x</sub>	LAM
Idle	800	15	0.04	4.11	14.16	85	3.414
After (5 Min)	800	23	0.01	2.43	17.33	169	5.905
Idle	1500	18	0.03	4	14.9	54	3.569
After (5 Min)	1500	24	0.02	2.36	15.73	71	4.167
Idle	2000	24	0.05	4.42	15.4	73	4.102
After (5 Min)	2000	23	0.03	3.2	14.63	69	3.458
Idle	2500	23	0.03	4.38	15.48	71	4.132
After (5 Min)	2500	23	0.04	2.98	15.17	62	3.71

There is also reduction in other emissions in the exhaust gases like carbon monoxides and nitrogen oxides.

### Conclusion

In this experiment we have successfully controlled emission of carbon dioxide from the diesel operated engines, which is about 9.266% of the overall emission from a vehicle. Through this other gases has also been controlled like hydro carbon, nitrogen, carbon monoxide and particulate matter.

### REFERENCES

- Combustion Analysis of a Diesel Engine Operating With Performance Improvement Additives – IJRES, 2012.
- Design, Analysis of flow Characteristics of Catalytic Converter and effects of Backpressure on Engine Performance – IJREAT, 2013.
- Garbrial David Oreggioni, Stenfane Brondoni, Mauro Lyberti, Yousuf Baykon, Denial Friedrich, Hyung Mongahn. CO<sub>2</sub> capture from syngas by an adsorption process at a biomass gasification CHP plant, its comparison with amine bases CO<sub>2</sub> capture.
- Jenoris Muthya S., V. Amarnath, P. Senthil Kumar, S. Mohan Kumar. Carbon capture and storage from automobile exhaust to reduce CO<sub>2</sub> emission.
- Kabir M. N., Y. Alginahi and K. Islam Simulation of Oxidation Catalyst Converter for After-treatment in diesel engines. *International Journal of Automotive Technology*, 2015, 16: 193-199.

- Karuppusamy P., Dr.R.Senthil. Design, Analyze, Flow characteristics of catalytic converter and effects of back pressure on engine performance. 2013, 1: 2320-8791
- Lucas J., M. A. Houghton and I. G. Mashete. Heat Exchanger/Catalytic System for Reducing the Exhaust Emissions from Diesel Engines. *International Journal of Automotive Technology*, 2012, 13: 853-860.
- Mangalapally HP, Notz R, Hoch S, Asprien N, Sieder G, Garcia H. Pilot plant experimental studies of post combustion CO<sub>2</sub> capture by reactive adsorption with MEA and new solvents. *Energy Procedia.*, 2009; 1:963-70.
- Mr. Sibuthomas, Ms. Nishi Shahnaidehaider A Study on Basics of a Gas Analyzer.
- MuhammedZaman and Jay Hyung Lee. Carbon capture from stationary power generation source: A review of the current status of the technology.
- MyladyDr.S.Rajadurai, Maya.J. Carbon-dioxide reduction in diesel power generator using modified charcoal. *International Journal of Recent Development in Engineering and Technology*, 2015.
- Nelson G. and Rick A. Babyok activated carbon use in treating diesel engine exhaust.
- Pankaj Kumar Singh, NamanTaneja. Design and analyse a spiral flow catalytic converter. *International Journal of Advances and Engineering Sciences*, 2015, 5:3
- Rajadurai S., R.K.Anulatha. Catalytic reduction of CO<sub>2</sub> in gasoline passenger car. 2014, 8.
- Rajadurai. S and R. K. Anulatha. Catalytic reduction of CO<sub>2</sub> in diesel engines – “A lot with a little”. *International Journal of Science and Advanced Technology*, 2014; 2:164 - 171.
- Solov'ev S. A. and S. N. Orlik. Structural and Functional Design of Catalytic Converters for Emissions from Internal Combustion Engines. *Springer*, 2009, 50: 734–744.
- Valentinas Mickūnaitis, AlvydasPikūnas, Igor Mackoit. Reducing Fuel Consumption and CO<sub>2</sub> Emission in Motor Cars. *Springer*, 2007, 22:160-163.

\*\*\*\*\*